



THE ART OF PLASTIC CONVERSION


Beyond Plastic,Beyond Pack.

温州晨祺进出口贸易有限公司


② 浙江省温州市瑞安市莘塍街道万松东路1700-1708-1718号
No. 1700-1708-1718,East Wansong Road, Xincheng
Street, Rui'an City, Wenzhou City,Zhejiang Province
☎ +86-(0)18158316891
✉ dylandai@chenqipack.com




Wenzhou Chenqi Imp&exp Trade Co., Ltd.

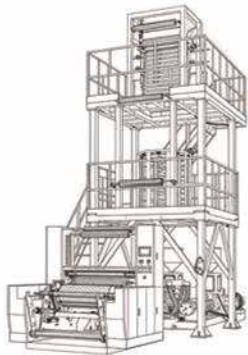


Film Blowing Machine

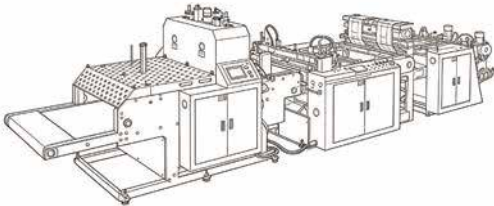


Bag Making Machine

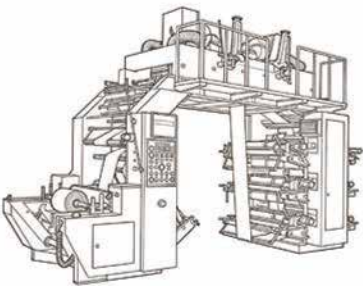

Printing Machine

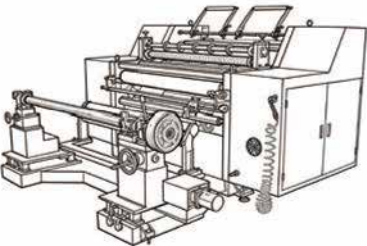

Slitting Machine



Recycle Granulation Unit



目录
CONTENTS

Company Profile	公司简介	01
Film Blowing Machine	吹膜机	03
Bag Making Machine	制袋机	18
Printing Machine	印刷机	26
Slitting Machine	分切机	28
Recycle Granulation Unit	造粒机	29

公司简介 Compay Profile




Wenzhou Chenqi Import & Export Trading Co., Ltd. supplies plastic and paper bag machinery (Film Blowing Machine, Bag Making Machine, Flexographic Printing Machine) and customizes complete production lines. With a professional team, 62 quality checks per machine, 12-month warranty, and global spare parts support, we serve 3,000+ overseas customers. "Entrust Always Valued" — your reliable machinery partner.

温州晨祺进出口贸易有限公司，专注塑料与纸袋机械领域，秉持“让托付始终值得”的理念，主营吹膜机、制袋机、柔版印刷机等核心设备，可根据客户地区差异定制匹配整厂生产线。公司拥有资深贸易团队、专业工程团队及多语言沟通能力，每台设备经62项严格质检，提供12个月质保、完善售后及常备备件。目前，设备远销全球多地，服务超3000家海外客户，是值得信赖的机械贸易伙伴。



PROCESS FLOW 工艺流程

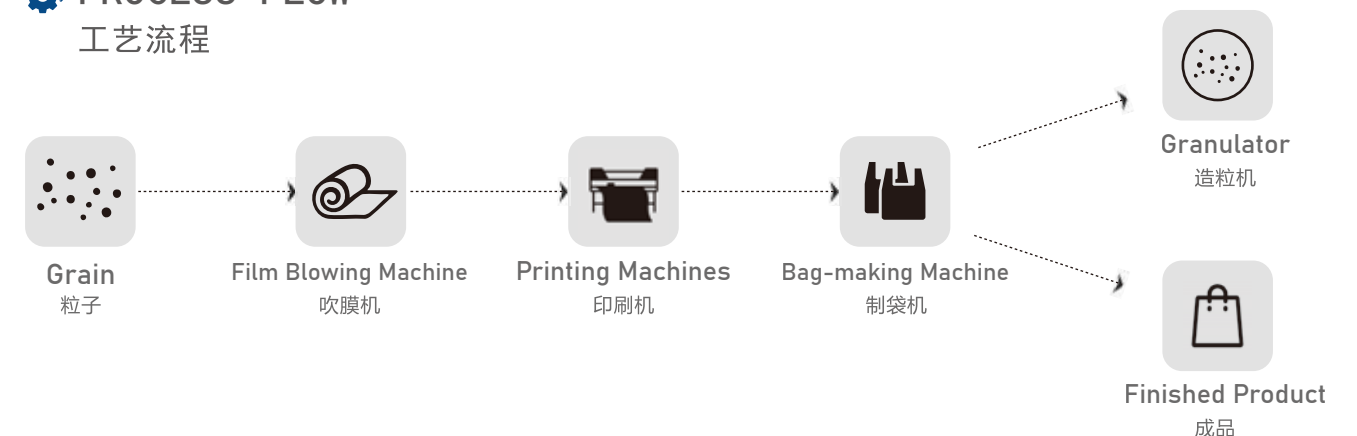

主要技术参数
Main Technical Parameters

型号	Model	5FFS-IBC
适应原料	Suitable material	LDPE、LLDPE、MLLDPE、HDPE
生产最大膜宽	Maximum film width	1000mm
制品厚度	Product thickness	0.10mm~0.25mm
螺杆直径	Screw diameter	A:Φ55 B:Φ55 C:Φ65 D:Φ55 E:Φ55
螺杆长径比	Screw l/d length	32:1
齿轮箱型号	Gearbox Model	A:173 B:173 C:200 D:173 E:173
电机功率	Motor power	A:30kw B:30kw C:37kw D:30kw E:30kw
最大挤出量	Max output	250-300Kg/h
最大收卷卷径	Max winding diameter	Φ1400mm
模口直径	Die diameter	Φ200mm
收卷方式	Winding method	Back to back automatic double winding 背靠背全自动双收卷
水平式360度上牵引旋转	Horizontal 360 degree upward traction rotation	
IBC膜泡内冷控制系统	Ibc bubbleinternal cooling control system	
多组分喂料系统	Multi feeding gravimetric dosing system	5 sets
设备外形尺寸(长×宽×高)	Machine outline dimension (L×W×H)	10×7.5×15m

· 机器外观及技术参数若有变更，恕不另行通知，未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.



5 LAYERS-FFS-IBC

5 Layers Internal Bubble Cooling FFS
film blowing production line

五层共挤重包装内冷吹膜生产线


设备配件
Equipment Accessories



主要技术参数
Main Technical Parameters

型号	Model	NYH-850
收卷电机	Winding motor	2.2KW
二次牵引	Secondary traction motor	2.2KW
牵引电机	Take-up motor	2.2KW
收卷直径	Rewind diameter	1400mm
放料直径	Feeding diameter	1400mm
辊筒直径	Roller diameter	400mm
收卷速度	Winding speed	120m/min
收卷尺寸	Winding size	2200×1500×1450mm
主机尺寸	Extruder size	3300×2900×4300mm

· 机器外观及技术参数若有变更，恕不另行通知，未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.

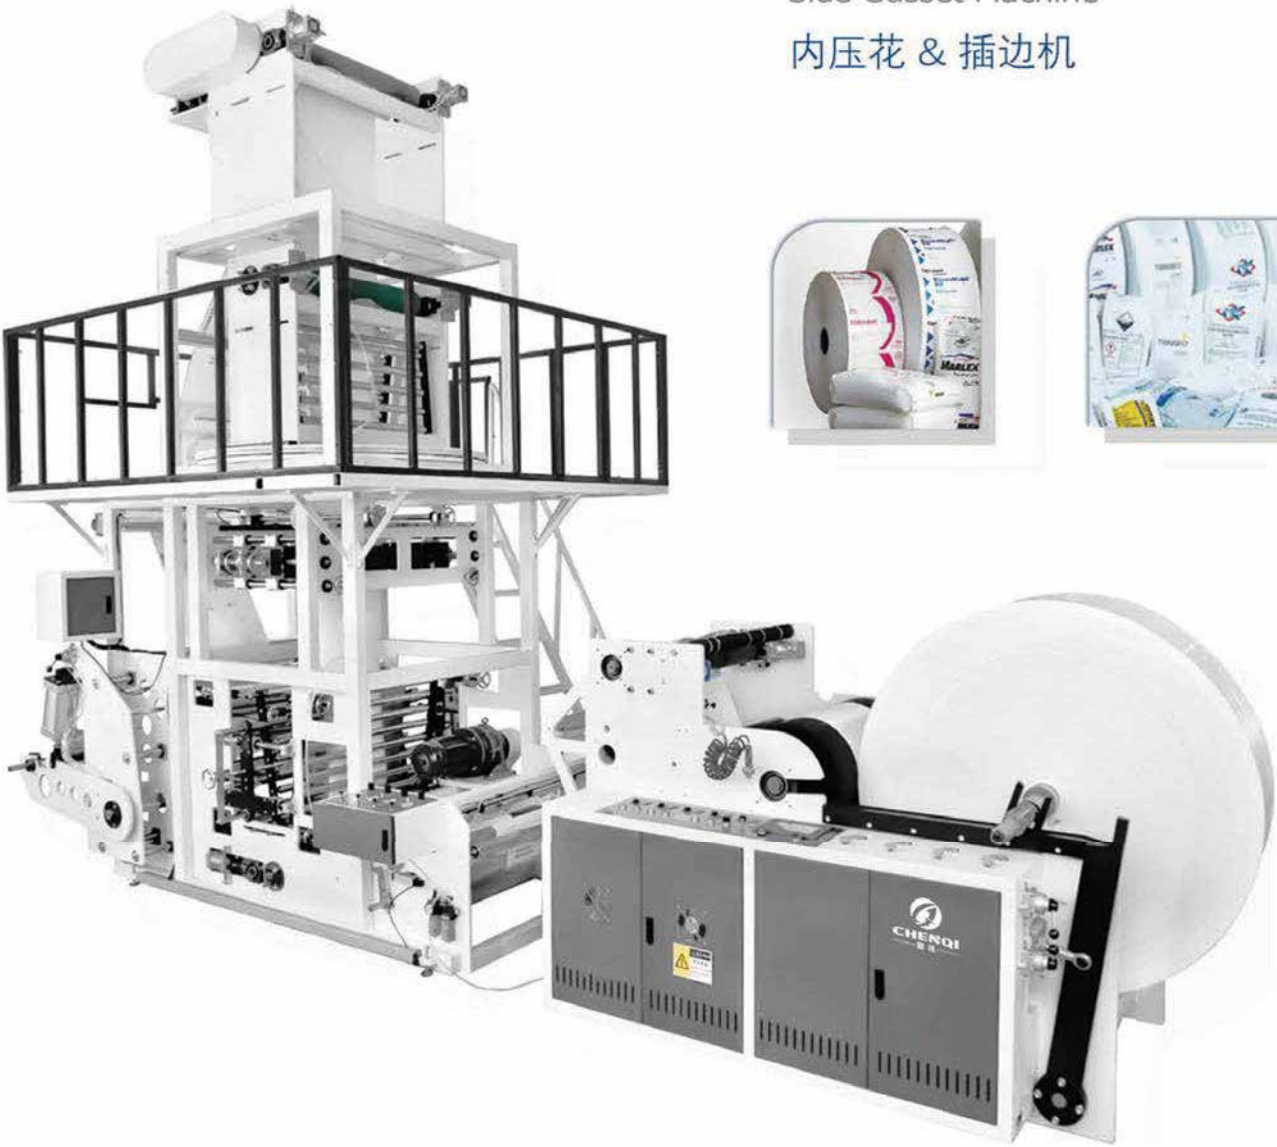

NYH-850

Vertical Type FFS Film Embossing &
Side Gusset Machine

内压花 & 插边机



主要技术参数
Main Technical Parameters

型号	Model	ABC-1400	ABC-1700	ABC-2200
通用材料	Suitable material	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
产品宽度	Film width	800-1200mm	1000-1500mm	1200-2000mm
产品厚度	Film thickness	0.028-0.20mm	0.028-0.20mm	0.03-0.20mm
最大产量	Max.extrusion output	150kg/hr	200kg/hr	250kg/hr
螺杆直径	Screw diameter	A:Φ50 B:Φ55 C:Φ50	A:Φ55 B:Φ65 C:Φ55	A:Φ65 B:Φ75 C:Φ65
螺杆长径比	Screw l/d length	32:1	32:1	32:1
主机功率	Main motor	A18.5kw+B22kw+C18.5kw	A22kw+B30kw+C22kw	A30kw+B37kw+C30kw
模口	Die size	300mm	350mm	500mm
风机	Air blower	7.5kw	11kw	15kw
牵引辊宽	Roller width	1400mm	1700mm	2200mm
引取电机功率	Take-up motor	1.5kw	2.2kw	2.2kw
卷取功率	Winding motor	1.5kw	2.2kw	2.2kw
外形尺寸 (长×宽×高)	Outline dimension(L×W×H)	9.5×4.5×7.5m	10.5×5.0×9m	11.5×5.5×10m

· 机器外观及技术参数如有变更，恕不另行通知，未得本公司书面特别许可，不得擅自翻印本资料。
· Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.

主要技术参数
Main Technical Parameters

型号	Model	ABC-1300	ABC-1600	ABC-2100
通用材料	Suitable material	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
产品宽度	Film width	800-1200mm	1000-1500mm	1200-2000mm
产品厚度	Film thickness	0.028-0.20mm	0.028-0.20mm	0.03-0.20mm
最大产量	Max.Extrusion output	150kg/hr	200kg/hr	250kg/hr
螺杆直径	Screw diameter	AΦ50 BΦ55 CΦ50	AΦ55 BΦ65 CΦ55	AΦ65 BΦ75 CΦ65
螺杆长径比	Screw l/d length	32:1	32:1	32:1
主机功率	Main motor	A18.5kw+B22kw+C18.5kw	A22kw+B30kw+C22kw	A30kw+B37kw+C30kw
模口	Die size	300mm	350mm	500mm
风机	Air blower	7.5kw	11kw	15kw
牵引辊宽	Roller width	1300mm	1600mm	2100mm
引取电机功率	Take-up motor	1.5kw	2.2kw	2.2kw
卷取功率	Winding motor	1.5kw	2.2kw	2.2kw
外形尺寸 (长×宽×高)	Outline dimension(L×W×H)	9.5×4.5×7.5m	10.5×5.0×9m	11.5×5.5×10m

· 机器外观及技术参数如有变更，恕不另行通知，未得本公司书面特别许可，不得擅自翻印本资料。
· Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.



ABC-IBC

3 Layers Co-Extrusion Internal Bubble Cooling Haul-Off Rotary Film Blowing Machine

三层共挤上旋转膜泡内冷吹膜机

设备配件
Equipment Accessories



ABC CO-EX

3 Layers Co-Extrusion Rotary Die Head Film Blowing Machine

三层共挤旋转模头吹膜机

选择性配备
Optional Equipment

自动吸料机	Auto loader
电晕处理	Corona treater
快换网装置	Fast screen changer
气涨轴	Air shaft
米克重	Metric weight system
自动收卷	Automatic winder



主要技术参数
Main Technical Parameters

型号	Model	ABA-900	ABA-1100	ABA-1300
通用材料	Suitable material	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
产品宽度	Film width	400-800mm	500-1000mm	600-1200mm
产品厚度	Film thickness	0.02-0.10mm	0.02-0.10mm	0.02-0.10mm
最大产量	Max. extrusion output	HDPE: 120kg/hr LDPE:150kg/hr	HDPE: 123kg/hr LDPE:180kg/hr	HDPE: 130kg/hr LDPE:200kg/hr
螺杆直径	Screw diameter	Φ50x2	Φ55x2	Φ55x1 Φ65x1
螺杆长径比	Screw l/d length	32:1	32:1	32:1
模口	Die size	LDPE: 180 HDPE: 80	LDPE: 220 HDPE: 100	LDPE: 250 HDPE: 120
风机	Air blower	5.5kwx1	5.5kwx1	7.5kwx1
牵引辊宽	Roller width	900mm	1100mm	1300mm
引取电机功率	Take-up motor	1.5kw	1.5kw	2.2kw
卷取功率	Winding motor	16N.m	16N.m	16N.m
外形尺寸(长×宽×高)	Outline dimension(L×W×H)	4.8×3.2×5.5m	5×3.5×6m	5×3.7×7.5m

· 机器外观及技术参数若有变更，恕不另行通知，未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.

主要技术参数
Main Technical Parameters

型号	Model	ABA-900	ABA-1100	ABA-1300
通用材料	Suitable material	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
产品宽度	Film width	400-800mm	500-1000mm	600-1200mm
产品厚度	Film thickness	0.02-0.10mm	0.02-0.10mm	0.02-0.10mm
最大产量	Max. extrusion output	HDPE: 80kg/hr LDPE:120kg/hr	HDPE: 100kg/hr LDPE:150kg/hr	HDPE: 120kg/hr LDPE:180kg/hr
螺杆直径	Screw diameter	Φ50x2	Φ55x2	Φ55x1 Φ65x1
螺杆长径比	Screw l/d length	32:1	32:1	32:1
模口	Die size	LDPE: 180 HDPE: 80	LDPE: 220 HDPE: 100	LDPE: 250 HDPE: 120
风机	Air blower	3kwx1	4kwx1	5.5kwx1
牵引辊宽	Roller width	900mm	1100mm	1300mm
引取电机功率	Take-up motor	1.5kw	1.5kw	2.2kw
卷取功率	Winding motor	16N.m	16N.m	16N.m
外形尺寸(长×宽×高)	Outline dimension(L×W×H)	4.8×3.2×5.5m	5×3.5×6m	5×3.7×7.5m

· 机器外观及技术参数若有变更，恕不另行通知，未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.



ABA CO-EX AUTO

Film Blowing Machine

吹膜机

选择性配备
Optional Equipment

自动吸料机	Auto loader
电晕处理	Corona treater
快换网装置	Fast screen changer
气胀轴	Air shaft
米克重	Metric weight system
自动收卷	Automatic winder



ABA CO-EX

Film Blowing Machine

吹膜机

选择性配备
Optional Equipment

自动吸料机	Auto loader
电晕处理	Corona treater
快换网装置	Fast screen changer
气胀轴	Air shaft
米克重	Metric weight system
自动收卷	Automatic winder



主要技术参数
Main Technical Parameters

型号	Model	AB-1100	AB-1600	AB-2000
通用材料	Suitable material	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
产品宽度	Film width	600-1200mm	800-1500mm	1000-1500mm
产品厚度	Film thickness	0.03-0.20mm	0.03-0.20mm	0.03-0.20mm
最大产量	Max. extrusion output	120kg/hr	150kg/hr	180kg/hr
螺杆直径	Screw diameter	Φ50+Φ55	Φ55+Φ60	Φ60+Φ65
螺杆长径比	Screw l/d length	32:1	32:1	32:1
主机功率	Main motor	15kw+18.5kw	18.5kw+22kw	22kw+30kw
模口	Die size	Φ220mm	Φ250mm	Φ350mm
风机	Air blower	5.5kw	7.5kw	11kw
牵引辊宽	Roller width	1100mm	1600mm	2000mm
引取电机功率	Take-up motor	1.5kw	1.5kw	2.2kw
卷取功率	Winding motor	10N.m	16N.m	18N.m
外形尺寸(长×宽×高)	Outline dimension(L×W×H)	6.5×5.5×5.5m	7.5×5.8×7.5m	7.8×6.4×9m

* 机器外观及技术参数若有变更，恕不另行通知，未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.

AB CO-EX

Double-Layer Co-extrusion Rotary
Die Head Film Blowing Machine set
两层共挤旋转机头吹膜机组

选择性配备
Optional Equipment

自动吸料机	Auto loader
电晕处理	Corona treater
快换网装置	Fast screen changer
气胀轴	Air shaft
米克重	Metric weight system
自动收卷	Automatic winder



主要技术参数
Main Technical Parameters

型号	Model	PP-600	PP-800	PP-1000
通用材料	Suitable material	PP	PP	PP
产品宽度	Film width	100-500mm	150-600mm	200-800mm
产品厚度	Film thickness	0.03-0.11mm	0.03-0.11mm	0.03-0.11mm
最大产量	Max. extrusion output	40kg/hr	55kg/hr	70kg/hr
螺杆直径	Screw diameter	Φ50	Φ55	Φ65
螺杆长径比	Screw l/d length	32:1	32:1	32:1
模口	Die size	Φ150	Φ250	Φ350
风机	Air blower	1.5kw	1.5kw	1.5kw
牵引辊宽	Roller width	600mm	800mm	1000mm
引取电机功率	Take-up motor	0.75kw	1.1kw	1.5kw
卷取功率	Winding motor	10N.m	16N.m	16N.m
外形尺寸 (长×宽×高)	Outline dimension(L×W×H)	3.2×2×3.5m	4.2×2.5×4m	4.6×2.8×4.5m

* 机器外观及技术参数若有变更，恕不另行通知，未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.


PP

Film Blowing Machine

吹膜机

选择性配备
Optional Equipment

自动吸料机	Auto loader
电晕处理	Corona treater
快换网装置	Fast screen changer
气胀轴	Air shaft
米克重	Metric weight system
自动收卷	Automatic winder

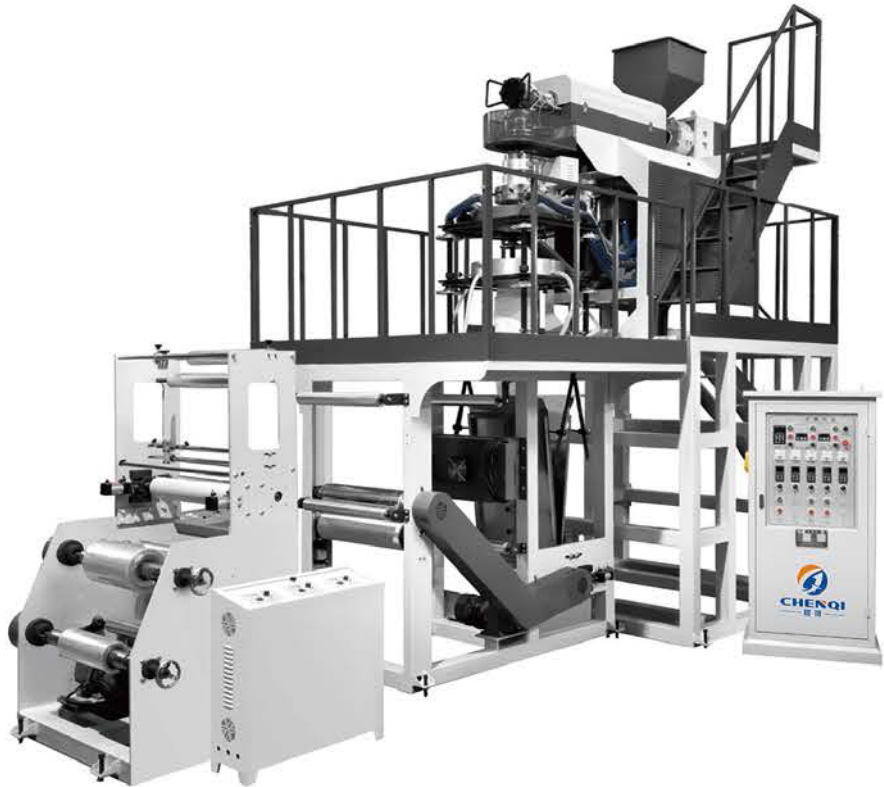

主要技术参数
Main Technical Parameters

型号	Model		MONO-75	MONO-100
通用材料	Suitable material		HDPE LDPE LLDPE	HDPE LDPE LLDPE
产品宽度	Film width		700-1500mm	1200-2000mm
产品厚度	Film thickness		0.03-0.20mm	0.03-0.20mm
最大产量	Max. extrusion output	HD	100kg/hr	150kg/hr
		LD	150kg/hr	200kg/hr
螺杆直径	Screw diameter		Φ75	Φ100
螺杆长径比	Screw l/d length		32:1	32:1
模口	Die size	HD	Φ150	Φ200
		LD	Φ350	Φ500
风机	Air blower		7.5kw	11kw
牵引辊宽	Roller width		1600mm	2100mm
引取电机功率	Take-up motor		1.5kw	2.2kw
卷取功率	Winding motor		25N.m	25N.m
外形尺寸(长×宽×高)	Outline dimension(L×W×H)		6×3×7.5m	71×3.5×9m

• 机器外观及技术参数若有变更，恕不另行通知，未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Chenqi reserves the right to supply the improved product without prior notice.

MONO HDPE/LDPE PLUS

Single Screw Film Blowing Machine

单螺杆吹膜机

选择性配备
Optional Equipment

自动吸料机	Auto loader
电晕处理	Corona treater
快换网装置	Fast screen changer
气胀轴	Air shaft
米克重	Metric weight system
自动收卷	Automatic winder



主要技术参数
Main Technical Parameters

型号	Model		MONO-45	MONO-50	MONO-55	MONO-60	MONO-65
通用材料	Suitable material		HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
产品宽度	Film width		100-500mm	300-600mm	400-800mm	500-1000mm	600-1200mm
产品厚度	Film thickness	HD	0.009-0.10mm	0.009-0.10mm	0.009-0.15mm	0.009-0.15mm	0.009-0.15mm
		LD	0.02-0.15mm	0.02-0.15mm	0.03-0.15mm	0.03-0.15mm	0.03-0.15mm
最大产量	Max. extrusion output	HD	40kg/hr	45kg/hr	55kg/hr	60kg/hr	70kg/hr
		LD	50kg/hr	55kg/hr	65kg/hr	75kg/hr	100kg/hr
螺杆直径	Screw diameter		Φ45	Φ50	Φ55	Φ60	Φ65
螺杆长径比	Screw l/d length		32:1	32:1	32:1	32:1	32:1
模头尺寸	Die size	HD	Φ60	Φ80	Φ80	Φ100	Φ100
		LD	Φ100	Φ120	Φ180	Φ200	Φ220
风机	Air blower		1.5kw	2.2kw	3kw	4kw	4kw
牵引辊宽	Roller width		600mm	700mm	900mm	1100mm	1300mm
引取电机功率	Take-up motor		0.75kw	1.1kw	1.5kw	1.5kw	2.2kw
卷取功率	Winding motor		6N.m	10N.m	10N.m	16N.m	16N.m
外形尺寸(长×宽×高)	Outline dimension(L×W×H)		3.8×2.0×4.1m	5.0×2.2×4.5m	5.5×2.5×5.2m	5.8×2.8×6.3m	5.8×2.8×6.3m

• 机器外观及技术参数若有变更，恕不另行通知，未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Chenqi reserves the right to supply the improved product without prior notice.

MONO LDPE/HDPE

Single Screw Film Blowing Machine

单螺杆吹膜机



主要技术参数
Main Technical Parameters

型号	Model		MONO-PRO45	MONO-PRO50	MONO-PRO55	MONO-PRO60	MONO-PRO65
通用材料	Suitable material		HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
产品宽度	Film width		100-500mm	300-600mm	400-800mm	500-1000mm	600-1200mm
产品厚度	Flim thickness	HD	0.009-0.10mm	0.009-0.10mm	0.009-0.15mm	0.009-0.15mm	0.009-0.15mm
		LD	0.02-0.15mm	0.02-0.15mm	0.03-0.15mm	0.03-0.15mm	0.03-0.15mm
最大产量	Max. extrusion output	HD	40kg/hr	45kg/hr	55kg/hr	60kg/hr	60kg/hr
		LD	50kg/hr	55kg/hr	65kg/hr	75kg/hr	100kg/hr
螺杆直径	Screw diameter		Φ45	Φ50	Φ55	Φ60	Φ65
螺杆长径比	Screw l/d length		32:1	32:1	32:1	32:1	32:1
模头	Type of die		模头	模头	模头	模头	模头
风机	Air blower		1.5kw	2.2kw	3kw	4kw	4kw
牵引辊宽	Roller width		600mm	700mm	900mm	1100mm	1300mm
引取电机功率	Take-up motor		0.75kw	1.1kw	1.5kw	1.5kw	1.5kw
卷取功率	Winding motor		6N.m	10N.m	10N.m	16N.m	16N.m
外形尺寸(长×宽×高)	Outline dimension(L×W×H)		3.8×2.0×4.1m	5.0×2.2×4.5m	5.5×2.5×5.2m	5.8×2.8×6.3m	5.8x2.8x6.3m

· 机器外观及技术参数若有变更，恕不另行通知。未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.

MONO-PRO

Single Screw Film Blowing Machine
Pro Series

单螺杆高低压吹膜机

选择性配备
Optional Equipment

自动吸料机	Auto Loader
电晕处理	Corona Treater
旋转模头	Rotary Die Head
空气压缩机	Air Compressor
快换网装置	Fast screen changer
双收卷	Double Winder
气胀轴	Air Shaft



MONO DOUBLE HEAD

Single-screw Double-die Film
Blowing Machine Set

单螺杆双模头吹膜机

主要技术参数
Main Technical Parameters

型号	Model	SJ-60	SJ-70
螺杆直径	Screw diameter	Φ60	Φ70
螺杆长径比	Screw l/d length	32:1	32:1
薄膜宽度	Film width	100-500mm	100-600mm
薄膜厚度	Thickness of film	0.010-0.08mm	0.010-0.08mm
主机功率	Power of main motor	22kw	30kw
产量	Output	40-60kg/h	50-70kg/h
外形尺寸(长×宽×高)	Outline dimension(LxWxH)	6200×3000×3200mm	6500×3200×3300mm


· 机器外观及技术参数若有变更，恕不另行通知。未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.



MONO-INLINE
PRINTING(FLEXO)

PE Extruder And Printing Machine

塑料吹膜柔版印刷机组

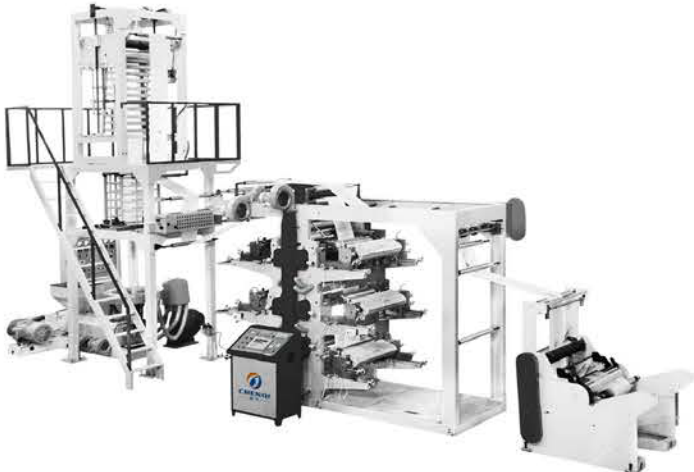

DOUBLE COLOR

Double-colour
Film Blowing Machine Set

双色彩条吹膜机

主要技术参数
Main Technical Parameters

型号	Model	S-40Dx2x700
螺杆直径	Screw diameter	40x2
螺杆长径比	Screw l/d length	32:1
最大挤出量	Main output	30-60kg/h
薄膜宽度	Film width	600mm
薄膜厚度	Thickness of film	0.01-0.06mm
主机功率	Power of main motor	11kw
外形尺寸(长×宽×高)	Outline dimension(L×W×H)	3800×2000×5200mm

· 机器外观及技术参数若有变更，恕不另行通知。未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.

主要技术参数
Main Technical Parameters

型号	Model		SJ-P45	SJ-P50	SJ-P55	SJ-P60	SJ-P65
通用材料	Suitable material		HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
产品宽度	Film width		100-500mm	300-600mm	400-800mm	500-1000mm	600-1200mm
产品厚度	Fim thickness	HD	0.009-0.10mm	0.009-0.10mm	0.009-0.15mm	0.009-0.15mm	0.009-0.15mm
		LD	0.02-0.15mm	0.02-0.15mm	0.03-0.15mm	0.03-0.15mm	0.03-0.15mm
最大产量	Max. extrusion output	HD	40kg/hr	45kg/hr	55kg/hr	60kg/hr	60kg/hr
		LD	50kg/hr	55kg/hr	65kg/hr	75kg/hr	100kg/hr
螺杆直径	Screw diameter		Φ45	Φ50	Φ55	Φ60	Φ65
螺杆长径比	Screw l/d length		32:1	32:1	32:1	32:1	32:1
模口	Die size	HD	Φ60/80	Φ60/100	Φ80/100	Φ100	Φ120/150
		LD	Φ100/120	Φ120/150	Φ180/200	Φ200	Φ220/250
风机	Air blower		1.5kw	2.2kw	3kw	4kw	4kw
牵引辊宽	Roller width		600mm	700mm	900mm	1100mm	1300mm
主机功率	Main motor		11kw	15kw	18.5kw	22kw	22kw
引取电机功率	Take-up motor		0.75kw	1.1kw	1.1kw	1.5kw	1.5kw
卷取功率	Winding motor		10N.m	10N.m	10N.m	16N.m	16N.m
外形尺寸(长×宽×高)	Outline dimension(L×W×H)		5.0×2.0×4.1m	5.0×2.1×4.5m	5.5×2.3×5.2m	5.8×2.8×6.3m	5.8×2.6×6.3m
印刷长度	Pritning length(mm)		250-1000	250-1000	250-1000	250-1000	250-1000

· 机器外观及技术参数若有变更，恕不另行通知，未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.

ABA-INLINE
PRINTING(GRAVURE)

Film Blowing Machine Inline
Gravure Printing Unit

塑料吹膜凹版印刷机组

选择性配备
Optional Equipment

自动吸料机	Auto loader
电晕处理	Corona treater
快换网装置	Fast screen changer
气胀轴	Air shaft
米克重	Metric weight system
自动收卷	Automatic winder



MINI MONO
PEFORMANCE/HIGHSPEED

High Speed Mini Film Blowing Machine

迷你型高速吹膜机

主要技术参数
Main Technical Parameters

型号	Model	MINI-45-PRO
产品宽度	Film width	100-500mm
产品厚度	Film thickness	0.01-0.10mm
最大产量	Max extrusion output	HD(50kg) LD(60kg)
螺杆直径	Screw diameter	Φ45mm
主机功率	Main motor	18.5kw
模口	Die size	Φ60mm.台湾式高速模头
		Taiwan style high speed die head
外形尺寸(长×宽×高)	Outline dimension (L×W×H)	3×1.5×3.6m

· 机器外观及技术参数若有变更，恕不另行通知，未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.



MINI MONO

MINI Type Film Blowing Machine

迷你型吹膜机

选择性配备
Optional Equipment

自动吸料机	Auto loader
电晕处理	Corona treater
快换网装置	Fast screen changer
气胀轴	Air shaft
米克重	Metric weight system
自动收卷	Automatic winder

主要技术参数
Main Technical Parameters

型号	Model	MINI-45
产品宽度	Film width	100-500mm
产品厚度	Film thickness	HD 0.01-0.10mm
		LD 0.02-0.15mm
最大产量	Max extrusion output	HD 40kg/hour
		LD 50kg/hour
螺杆直径	Screw diameter	Φ45
螺杆长径比	Screw l/d length	32:1
模口	Die size	HD Φ60
		LD Φ100
牵引辊宽	Roller width	600mm
有效引取膜宽度	Effective width	500mm

· 机器外观及技术参数若有变更，恕不另行通知，未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.

性能特点
Performance Characteristics

- 1、螺杆：55型，碳化型，降解特质螺杆

2、齿轮箱：180型

3、电机：22KW 带变频调节

4、收卷采用中心收卷2层，每层独立气胀轴带独立变频器控制

5、冷却风机采用变频控制，无噪音

6、模头采用30-180mm模口给客户选择（模头只能选一个）

7、模头带冷却功能

8、螺杆采用3驱冷却，并用离心风机控制

9、风环采用降解惯用风环，双封口带温控隔离槽的特质风环

10、随机配备：工具箱，易损件等

11、尺寸：(L)4800×(W)3200×(H)5000mm

12、最大膜宽800mm
1. Screw diameter: 55mm

2. Gear box: 180 model

3. Main motor: 22kw, with inverter

4. Winder station: center rewinder, 2 layer, each layer with air shaft and with inverter

5. Air blower: with inverter

6. Die head: 30-180mm, customer only can choose one size die head.

7. Die head with cooling

8. Screw with 3 zone cooling, and with air blower

9. Air ring: double lip air ring specially air ring only for biodegradable film

10. Spare parts: tool box and others

11. Machine size: 4800×3200×5000mm

12. Film width: 800mm, roller: 900mm

MONO BIODEGRADABLE

Biodegradable Film Blowing Machine

降解料吹膜机



DFR-450×2

Middle Speed Double-channels
Heat-sealing & heat-cutting Bag-making Machine
中速双通热封热切制袋机



主要技术参数
Main Technical Parameters

型号	Model	DFR-450×2
制袋宽度	Bag-making width	200-400mm
制袋长度	Bag-making length	10-999mm
制袋厚度	Bag-making thickness	0.01-0.05mm
制袋速度	Bag-making speed	120-200pcs/min
主机功率	Main motor	1.5kw
总功率	Total power	4.6kw
机重	Weight	900kg
外形尺寸(长×宽×高)	Dimensions(L×W×H)	2500×1300×1500mm



SDS-600/1000

Computer Heat-cutting Side Sealing
Bagmaking Machine
电脑热切边封制袋机

主要技术参数
Main Technical Parameters

型号	Model	SDS-600	SDS-800	SDS-1000
封切长度	Length of sealing&cutting	600mm	600mm	600mm
封切宽度	Width of sealing&cutting	580mm	780mm	980mm
制袋速度	Speed of bag-making	40-198pcs/min	40-150pcs/min	40-120pcs/min
主机功率	Main power	1.1kw	1.5kw	1.5kw
机重	Weight	800kg	1000kg	1200kg
外形尺寸(长×宽×高)	Outline dimension(L×W×H)	3600×1150×1700mm	3600×1350×1700mm	3600×1550×1700mm

ZB Series

Edge Folding And Rolling Machine
折边收卷机



主要技术参数
Main Technical Parameters

型号	Model	ZB-1200	ZB-1400	ZB-1600
最大基材宽度	Max width of base material	1200mm	1400mm	1600mm
最高收卷速度	Max roll speed	60m/min	60m/min	60m/min
总功率	Motor power	1.1kw	1.1kw	1.5kw
外形尺寸(长×宽×高)	Outline dimension(L×W×H)	2400×1500×1500mm	2600×1500×1500mm	2800×1500×1500mm
机重	Weight	800kg	900kg	1000kg

• 机器外观及技术参数若有变更，恕不另行通知。未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.

VEST-600/700/800

Automatic T-shirt Bag
Making Machine (One Line)
全自动背心袋成型制袋机



主要技术参数
Main Technical Parameters

型号	Model	VEST-600/700/800
制袋宽度	Max width of bag-making	200-650mm
制袋长度	Max length of bag-making	200-650mm
薄膜厚度	Thickness of film	0.015-0.035mm
制袋速度	Speed of bag-making	80-150pcs/min
外形尺寸(长×宽×高)	Outline dimension(L×W×H)	5500×1200×1800mm



VEST-500x2

Automatic T-shirt Bag-making
Machine (Two Lines)
双道全自动背心袋成型制袋机

主要技术参数
Main Technical Parameters

型号	Model	VEST-500x2
制袋宽度	Max width of bag-making	450mm×2
制袋长度	Max length of bag-making	650mm
制袋速度	Max speed of bag-making	210pcs/min×2
薄膜单面厚度	Single-face film thickness	0.010-0.025mm
外形尺寸(长×宽×高)	Outline dimension(L×W×H)	5500×1800×1600mm
机重	Weight	2700kg

VEST-430x2

High-speed Automatic T-shirt
Bag-making Machine (Two Lines)
双道高速全自动背心袋成型制袋机



主要技术参数
Main Technical Parameters

型号	Model	VEST-430x2
最大制袋宽度	Max width of bag-making	400mm×2
最大制袋长度	Max length of bag-making	650mm
制袋速度	Max speed of bag making	350pcs/min×2
薄膜单面厚度	Single-face film thickness	0.010-0.025mm
外形尺寸	Outline dimension(L×W×H)	5400×1850×1500mm
主机电机功率	Main motor	3.7kw

• 机器外观及技术参数若有变更，恕不另行通知，未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.

BTS-1000TF

Single line Tensign Free Double Knife
Bottom Sealing Machine
单道冷切双烫刀无张力制袋机



主要技术参数
Main Technical Parameters

型号	Model	BTS-1000TF
制袋长度	Bag Making Length	1500mm
制袋宽度	Bag Making Width	900mm
薄膜厚度	Film thickness	0.02-0.20mm
速度	Speed	30-100 pcs/min
主机功率	Main motor	2.2KW
电源	Power	380V 50HZ
机器重量	Weight	900kg
外型尺寸 (长×宽×高)	Machine size(L×W×H)	4200×1550×1500mm



ZB-FFS800

Heavy Duty Bag Making Machine
With Flying Knife
重包装飞刀制袋机

主要技术参数
Main Technical Parameters

型号	Model	ZB-FFS800
最大制袋宽度	Max width of bag-making	700mm
最大制袋长度	Max length of bag-making	1350mm
制袋速度	Bag making speed	10-30pcs/min
薄膜厚度	Film thickness	0.10-0.20mm
平均耗电量	Average power consume	10kw
机器尺寸	Machine dimension (L×W×H)	6300×1700×1600mm
机器重量	Machine weight	1500kg

CQ-1300TF

Fully Automatic Tension Free Resistance Wire
Heavy&Long Bag Making Machine (Flying Knife)
无张力飞刀电阻丝底封重型袋制袋机



主要技术参数
Main Technical Parameters


型号	Model	CQ-1300TF
制袋宽度	Bag Making Width	1200mm
制袋长度	Bag Making Length	300-5000mm
薄膜厚度	Film thickness	0.02-0.20mm
主机功率	Main motor	1.5kw
机器重量	Weight	2000kg
外型尺寸 (长×宽×高)	Machine size (L×W×H)	6800×2100×1300mm

• 机器外观及技术参数若有变更，恕不另行通知，未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.

BTS-600/1200

Computer Heat-sealing & Cold-cutting
Bag-making Machine (bottom sealing)


单道热封冷切制袋机

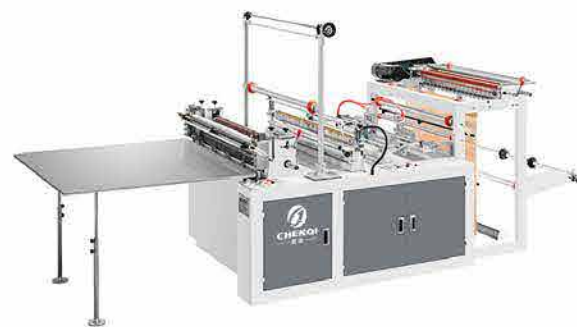

主要技术参数

Main Technical Parameters

型号	Model	BTS-600	BTS-800	BTS-1000	BTS-1200
制袋最大宽度	Max. width of bag making	550mm	750mm	950mm	1150mm
制袋最大长度	Max. length of bag making	1500mm	1500mm	1500mm	1500mm
制袋速度	Speed of bag making	30-120pcs/min	30-100pcs/min	30-100pcs/min	30-80pcs/min
主电机功率	Power of motor	1.5kw	1.5kw	1.5kw	2.2kw
外形尺寸(长×宽×高)	Machine size(L×W×H)	3200×1150×1550mm	3200×1350×1650mm	3200×1550×1750mm	3400×1750×1850mm
机重	Weight	750kg	900kg	1100kg	1300kg

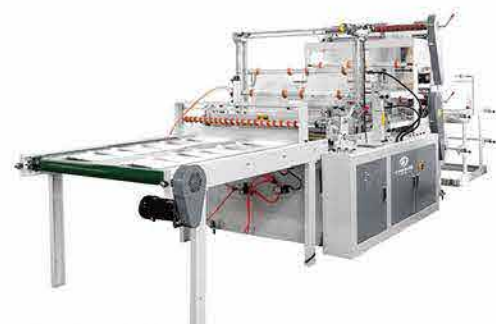

BTS-4-600/1200

Double Layer 4 Lines bottom Seling &
Cold Cutting Bag Machine

四线底封冷切制袋机

主要技术参数


Main Technical Parameters

型号	Model	BTS-4-600	BTS-4-800	BTS-4-1000	BTS-4-1200
封切宽度	Width of sealing	550mm	750mm	950mm	1150mm
封切长度	Length of sealing	950mm	950mm	950mm	950mm
制袋速度	Speed of bag-making	30-120pcs/min	30-100pcs/min	30-100pcs/min	30-80pcs/min
电机功率	Power	1.5kw	1.5kw	1.5kw	2.2kw
外形尺寸(长×宽×高)	Machine size(L×W×H)	3200×1150×1700mm	3200×1350×1800mm	3600×1550×1900mm	3600×1750×2000mm
机重	Weight	800kg	1000kg	1200kg	1400kg

BTS-6-600/1200

Double Layer 6 Lines bottom Seling &
Cold Cutting Bag Machine

六线底封冷切制袋机

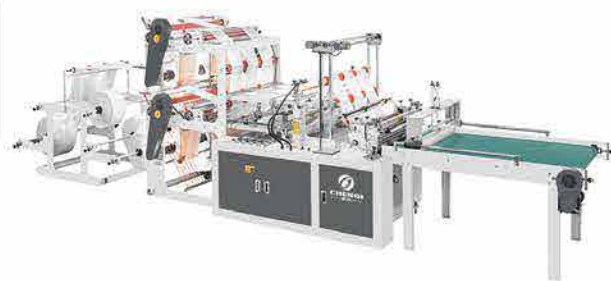

主要技术参数

Main Technical Parameters


型号	Model	BTS-6-600/800/1000/1200
制袋宽度	Bag width	350mm
制袋长度	Bag length	100-600mm
材料	Material	LDPE HDPE
厚度	Thickness	0.01-0.025mm
制袋速度	Speed	50-120pcs/min x4
加热功率	Heating power	6kw
总功率	Total power	8kw
伺服电机	Servo motor	1.5kw
主电机	Main motor	1.5kw
放料主机	Unwinding motor	750wx4
机重	Weight	2000kg

* 机器外观及技术参数若有变更，恕不另行通知。未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuzhen reserves the right to supply the improved product without prior notice.

CQ-4-800/1000/1200

Double-layer 4 Lines Cold Cutting
Automatic T-shirt Bag Making Machine

双层四线全自动冷切背心袋制袋机

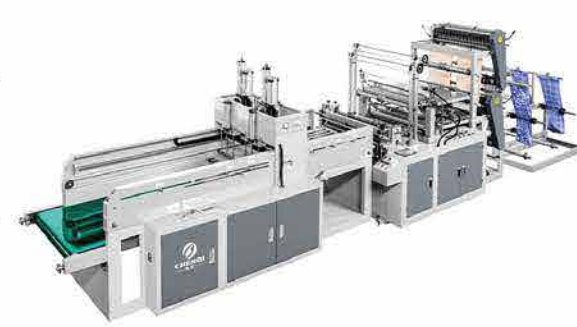

主要技术参数

Main Technical Parameters

型号	Model	CQ-4-800/1000/1200
袋宽(单色)	Bag width(non printed)	100-450mm×4
主电机	Main power	1.5kw
袋宽(彩色)	Bag width(Printed)	100-950mm
袋长	Bag length	650mm
放料电机	Unwinding motor	400w×4
生产速度	Speed	40-120pcs/min×4
薄膜厚度	Fim thickness	0.01-0.05mm
整机重量	Gross weight	2500kg
外形尺寸 (长×宽×高)	Machines size(L×W×H)	6500×1550×2000mm



CQ-6-800/1000/1200

Double-layer 6 Lines Cold Cutting
Automatic T-shirt Bag Making Machine

双层六线全自动冷切背心袋制袋机

主要技术参数


Main Technical Parameters

型号	Model	CQ-6-800/1000/1200
封切宽度	Width of sealing	120-320mm
封切长度	Length of sealing	650mm
制袋速度	Speed of bag-making	30-100pcs/min x6
电机功率	Power	2.2kw
外形尺寸 (长×宽×高)	Machine size(L×W×H)	7500×1750×2000mm
机重	Weight	2000kg

CQ-8-800/1000/1200

Double-layer 8 Lines Cold Cutting
Automatic T-shirt Bag Making Machine

双层八线全自动冷切背心袋制袋机

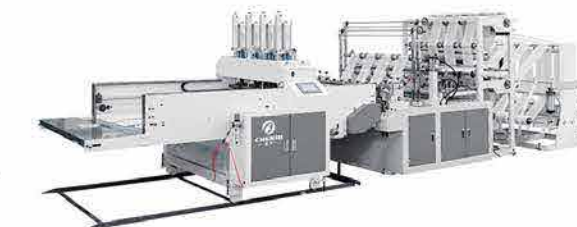

主要技术参数

Main Technical Parameters

型号	Model	CQ-8-800/1000/1200
制袋宽度	Width of bag-making	120-195mm
制袋长度	Length of bag-making	650mm
制袋速度	Speed of bag-making	30-100pcs/min x8
薄膜厚度	Film thickness	0.01-0.03mm
机器重量	Machine weight	3000kgs
机器尺寸	Machine dimension(L×W×H)	7500×1750×2000mm

* 机器外观及技术参数若有变更，恕不另行通知。未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuzhen reserves the right to supply the improved product without prior notice.

CQCS-800/1000

Ribbon-through Continuous-rolled Bag Making Machine

穿带连卷制袋机

主要技术参数
Main Technical Parameters

型号	Model	CQCS-800	CQCS-1000
制袋宽度/深度	Bag making width/depth	400-700mm	500-900mm
制袋长度	Bag making length	300-1000mm	500-1000mm
制袋速度	Bag making speed	50-160pcs/min	50-160pcs/min
制袋厚度	Bag making thickness	HDPE: 0.007-0.02mm LDPE: 0.02-0.05mm	HDPE:0.007-0.02mm LDPE: 0.02-0.05mm
总功率	Total power	18kw	18kw
总重量	Total weight	2500kg	2500kg
整机尺寸	Overall dimension(L×W×H)	10000×2200×1900m	10000×2200×1900mm



CORE-500

Automatic Rolling Bag Making Machine With Core

全自动有芯连卷平口保鲜袋纸袋机

主要技术参数
Main Technical Parameters

型号	Model	CORE-500
制袋速度	Speed of bag making	50-300bags/min
最高线速度	Max. speed of film	120m/min
制袋长度	Length of bag making	90-1000mm
制袋宽度	Width of bag making	60-400mm
制袋厚度	Thickness of bag making	0.005-0.015mm
制袋形式	Bag making methods	Shopping bag with core 有芯购物袋
温控区间	Temperature control zone	2 Zones
加热总功率	Heating power	6kw
总功率	Total power of machine	15kw
机器尺寸	Dimension of machine (L×W×H)	6000x1300x1800mm

CORELESS-400×2

Automatic double lines Rolling Bag Making Machine Coreless

全自动双道无芯连卷制袋机

主要技术参数
Main Technical Parameters

型号	Model	CORELESS-400×2
制袋宽度	Bag making width	100-180mm
制袋长度	Bag making length	400-1200mm
制袋速度	Bag making speed	50-200pcs/min
制袋厚度	Bag making thickness	0.006-0.025mm
制袋形式	Bag making methods	Coreless Garbage Bag (Star Bottom) 无芯平口垃圾袋(星底)
加热总功率	Heating power	8kw
温控区间	Temperature control zone	4 Zones
总功率	Total power	20kw
总重量	Total weight	2000kg
整机尺寸	Overall dimension(L×W×H)	6200x2000x1750mm



DFL Series

Dfl Series Computer Cutting-off Continuous-rolled Bag Making Machine

电脑点断连卷制袋机

主要技术参数
Main Technical Parameters

型号	Model	DFL-500	DFL-600	DFL-700	DFL-800
制袋最大宽度	Max width of bag making	480mm	580mm	680mm	780mm
薄膜厚度	Film thickness	0.008-0.025mm	0.008-0.025mm	0.008-0.025mm	0.008-0.025mm
最大裁切长度	Max.cutting length	999mm	999mm	999mm	999mm
生产能力	Production capacity	30-120pcs/min	30-120pcs/min	30-120pcs/min	30-120pcs/min
总功率	Total power	3.2kw	3.4kw	3.6kw	4.2kw
外形尺寸(长×宽×高)	Outline dimension(L×W×H)	3350×900×1500mm	3350×1000×1500mm	3350×1100×1500mm	3350×1250×1500mm
机重	Weight	650kg	750kg	800kg	900kg



SHXJ-A

Computer Control Two-layer Rolling Bag-making Machine For Vest & Flat Bags

电脑控制双层连卷背心/平口袋制袋机


主要技术参数
Main Technical Parameters

型号	Model	SHXJ-A-500	SHXJ-A-600	SHXJ-A-700	SHXJ-A-800
制袋最大宽度	Max width of bag making	400mm*2	500mm*2	600mm	700mm
薄膜厚度	Max length of bag making	1000mm	1000mm	1000mm	1000mm
最大裁切长度	Thickness of film	0.01-0.10mm	0.01-0.10mm	0.01-0.10mm	0.01-0.10mm
生产能力	Speed of bag-making	20-200*2pcs/min	20-200*2pcs/min	20-200*2pcs/min	20-200*2pcs/min
总功率	Power	5kw	5kw	5kw	5kw
机重	Weight	800kg	800kg	800kg	800kg
外形尺寸(长×宽×高)	Outline dimension(L×W×H)	3500×1050×1800m	3500×1150×1800mm	3500×1250×1800mm	3500×1350×1800mm

CQ-4in1-800

Automatic Soft Loop Handle Bag-making Machine With Servo Motor

全自动四功能购物袋制袋机



主要技术参数
Main Technical Parameters

型号	Model	CQ-4in1-800
制袋宽度	Bag width	250-650mm
制袋长度	Bag length	250-650mm
薄膜厚度	Film thickness	0.02-0.05mm
总功率	Total power	8kw
外形尺寸(长×宽×高)	Outline dimensions(L×W×H)	7600×3000×1850
机重	weight	3000kg

• 机器外观及技术参数若有变更，恕不另行通知，未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.



CQ-HB

Soft Loop Handle
Bag-making Machine

软式手提环制袋机

主要技术参数
Main Technical Parameters

型号	Model	CQ-HB
制袋最大宽度	Max width of bag-making	250-600mm
制袋最大长度	Max length of bag-making	700mm
封切厚度	Thickness of material	0.05-0.2mm
制袋速度	Speed of bag making	20pcs/min
电源	Power	AC220V
电机功率	Total power	1.1kw
外形尺寸(长×宽×高)	Outline dimension(L×W×H)	1200×1200×1200mm
整机重量	Weight	1100kg



CQ-500C

Full Automatic Double Layer
Disposable Glove Machine

双层全自动一次性手套机

主要技术参数
Main Technical Parameters

型号	Model	CQ-500C
制手套长度	Glove length	200-350mm
制手套宽度	Glove width	240-320mm
薄膜厚度	Film thickness	0.008-0.02mm
制手套速度	Speed	80-400 pcs/min
主机功率	Main motor	2.2kw
电源	Power	380V 50HZ
机器重量	Weight	900kg
外型尺寸(长×宽×高)	Machine size(L×W×H)	2700×1100×1500mm

CQ-500B

Semi-Auto Disposable Glove Machine

半自动一次性手套机

主要技术参数
Main Technical Parameters

型号	Model	CQ-500B
制手套长度	Glove length	200-350mm
制手套宽度	Glove width	240-320mm
薄膜厚度	Film thickness	0.008-0.02mm
制手套速度	Speed	80-400 pcs/min
主机功率	Main motor	2.2KW
电源	Power	380V 50HZ
机器重量	Weight	900kg
外型尺寸(长×宽×高)	Machine size(L×W×H)	2700×1100×1500mm



· 机器外观及技术参数若有变更，恕不另行通知，未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior r

主要技术参数
Main Technical Parameters

型号	Model	YT-600	YT-800	YT-1000
最大材料宽度	Max.width of substrate	600mm	800mm	1000mm
最大印刷宽度	Max.printing width	560mm	760mm	960mm
合适的印刷材料	Printing materials	PE PP Film / Paper / Woven bag / Non-woven		
最大印刷速度	Printing speed	120m/min	120m/min	120m/min
板材厚度	Plate thickness	1.14-3.94	1.14-3.94	1.14-3.94
整机重量	Weight of machine	5000	5500	6000
外形尺寸(长×宽×高)	Machine size (L×W×H)	6.8×1.8×2.9m	6.8×2×2.9m	6.8×2×2.9m

· 机器外观及技术参数若有变更，恕不另行通知，未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.

设备配备
Machine Equipped

同步带传动	Synchronous Belt Drive
封闭式循环大烘箱	Closed Cycle Large Oven
陶瓷网纹辊	Ceramic Anilox Roller
封闭式刮刀	Closed Chamber Dr.blades

YT-S Series Printer

2/4/6/8 colors Flexo High Speed
Printing Machine

柔版同步带型高速印刷机



主要技术参数
Main Technical Parameters

型号	Model	YT-2600	YT-2800	YT-21000	YT-4600	YT-4800	YT-41000	YT-6600	YT-6800	YT-61000
最大印料宽度	Max width of substrate	600mm	800mm	1000mm	600mm	800mm	1000mm	600mm	800mm	1000mm
最大印刷宽度	Max printing width	560mm	760mm	960mm	560mm	760mm	960mm	560mm	760mm	960mm
印刷品长度范围	Range of printing length	200-1100mm	180-1000mm	200-1100mm	200-1100mm	200-1100mm	200-1100mm	200-1100mm	200-1100mm	200-1100mm
卷材最大直径	Max diameter of web	Φ450mm	Φ450mm	Φ450mm	Φ450mm	Φ450mm	Φ450mm	Φ450mm	Φ450mm	Φ450mm
印刷速度	Printing speed	5-50m/min	5-50m/min	5-50m/min	5-50m/min	5-50m/min	5-50m/min	5-50m/min	5-50m/min	5-50m/min
外形尺寸 (长×宽×高)	Outline dimension (L × W × H)	1900×1800 ×2300mm	1900×2000 ×2300mm	1900×2200 ×2400mm	4200×1600 ×2400mm	4200×1800 ×2400mm	4200×2000 ×2400mm	4200×1660 ×2950mm	4200×1860 ×2950mm	4200×2060 ×2950mm
外形尺寸 (长×宽×高)	Plate thickness(both side adhesive tape included)	2.38mm	2.38mm	2.38mm	2.38mm	2.38mm	2.38mm	2.38mm	2.38mm	2.38mm

· 机器外观及技术参数若有变更，恕不另行通知。未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.

YT-Series Printer

2/4/6/ colors Flexo Printing Machine

柔版齿轮传动型印刷机

选择性配备
Optional Equipment

凸版印刷制版机 Flexo plate making machine

2
色/colors



4
色/colors



6
色/colors



WFQ Series

Horizontal Type High Speed Automatic
Slitting Machine
(Separating And Cutting Machine)

卧式高速自动分切机




主要技术参数
Main Technical Parameters

型号	Model	WFQ-1000	WFQ-1300
分切卷材最大宽度	Max width of separating and cutting roll material	1000mm	1300mm
分切卷材放料最大直径	Max diameter of separating and cutting Roll material for unwinding	Φ700mm	Φ1000mm
分切卷材收料最大直径	Max diameter of separating and cutting Roll material for rewinding	Φ500mm	Φ500mm
分切卷材宽度	Width of roll material cutting	30-1000mm	30-1300mm
分切速度	Separating and cutting speed	5-160m/min	5-160m/min
纠偏误差	Deviation-rectfying error	≤0.5mm	≤0.5mm
总功率	Total power	3kw	4.8kw
外形尺寸（长×宽×高）	Outline dimension(L×W×H)	2540×1170×1460mm	2540×1370×1460mm
机重	Weight	2000kg	2800kg

LFQ Series

Lfq Series Vertical
Automaticslitting Machine
(Separating And Cutting Machine)

立式自动分条机

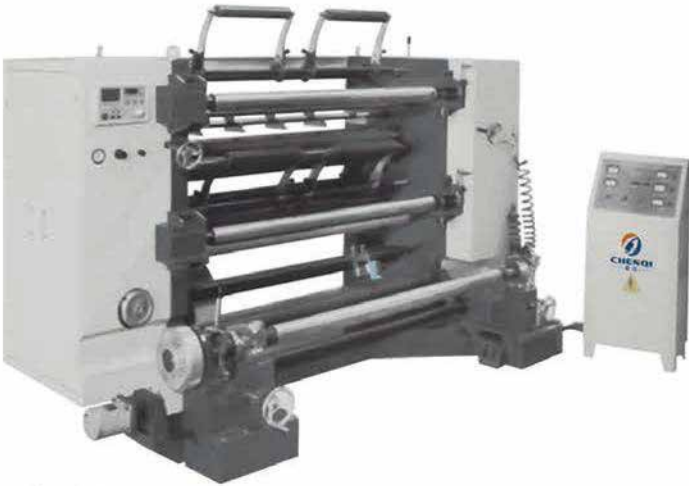

主要技术参数
Main Technical Parameters

型号	Model	LFQ-700	LFQ-1000	LFQ-1300
最大宽度	Max width	700mm	1000mm	1300mm
放料最大直径	Max diameter of unwinding	Φ600mm	Φ600mm	Φ600mm
收料最大直径	Max diameter of rewinding	Φ450mm	Φ450mm	Φ450mm
分切卷材宽度	Width of roll material cutting	30-650mm	30-1000mm	300-1300mm
分切速度	Separating and cutting speed	5-160m/min	5-160m/min	5-160m/min
纠偏误差	Deviation-rectfying error	≤0.5mm	≤0.5mm	≤0.5mm
总功率	Total power	2.2kw	3kw	3kw
外形尺寸（长×宽×高）	Outline dimension(L×W×H)	1100×770×1400mm	1100×1070×1400mm	2540×1370×1460mm
机重	Weight	1200kg	1500kg	2200kg

· 机器外观及技术参数若有变更，恕不另行通知。未得本公司书面特别许可，不得擅自翻印本资料。
Chenqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.

SJ-100/180

Single/Double machine hard material granulation unit

(PP.HDPE.LDPE.PS.PC.ABS.EVA)

单/双机硬料造粒机组



主要技术参数
Main Technical Parameters

型号	Model	SJ-100	SJ-180
主机螺杆直径	Diameter of main motor screw	Φ97mm	Φ117mm
副机螺杆直径	Diameter of auxiliary motor screw	95mm	107mm
主机功率	Power of main motor	15kw	18.5kw
副机功率	Power of auxiliary motor	7.5kw	11kw
切料机功率	Power of material cutter	1.5kw	1.5kw
加热功率	Power of heating	15kw	20kw
产量	Output	50kg/h	70-100kg/h
机器重量	Weight	1200kg	1800kg

SJ-B90/100/110/120

Wind Cooling Hot Cutting Recycling Machine

风冷造粒机



主要技术参数
Main Technical Parameters

型号	Model	SJ-B90	SJ-B100	SJ-B110	SJ-B120
螺杆直径	Diameter of screw	Φ90	Φ100	Φ110	Φ120
螺杆长径比	L/d of screw	20:1-22:1	20:1-22:1	20:1-22:1	20:1-22:1
螺杆转速	Rational speed of screw	10-110r/min	10-110r/min	10-110r/min	10-110r/min
主电机功率	Main motor power	22kw	30kw	37kw	45kw
产量	Output	68kg/hr	95kg/hr	120kg/hr	135kg/hr
机器重量	Weight	2600kg	2800kg	3000kg	3200kg
占地尺寸(长×宽×高)	Outline dimension(L×W×H)	4000×1500×1800mm	4200×1500×1800mm	4400×1500×1800mm	4600×1500×1800mm

* 机器外观及技术参数若有变更，恕不另行通知。未得本公司书面特别许可，不得擅自翻印本资料。
Chengqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.

CQ-ZLJ75/80

MINI Wind Cooling

Environmental Granulator

低温无水环保迷你造粒机



主要技术参数
Main Technical Parameters

型号	Model	ZX-ZLJ75
产量	Output	45-55kg/h
螺杆	Screw	Φ75
齿轮箱	Gear Box	#146
主电机	Main Motor	11kw
鼓风机	Air Blower	1.5kw
总功率	Total Power	19.15kw
重量	Machine Weight	946kg



SJ-B150/300

Plastic Grinding Milling Granulator

塑料混炼造粒机

主要技术参数
Main Technical Parameters

型号	Model	SJ-B150	SJ-B300
机器筒体容量	Capacity of barrel	150L	300L
生产能力	Output capacity	60-80kg/h	200-300kg/h
主电机功率	Main motor power	18.5kw	37.5kw
主轴转速	Rotary speed of main shaft	660r/min	660r/min
机器外形尺寸(长×宽×高)	Overall dimensions(L×W×H)	1800×750×1400mm	2000×900×1600mm
刀数	Number of knives	2 turn 6 fixed knife	3 turn 4 fixed knife
机器重量	Weight	900kg	1200kg

Plastic Grind Machine

Plastic crusher

塑料粉碎机



主要技术参数
Main Technical Parameters

型号	Model	F250	F500
产量	Output	100kg/hr	300kg/hr
电机	Motor	7.5kw	11kw
进料口尺寸	Size of material inlet	300×300mm	300×300mm
刀数	Cutter quantity	5pcs	8pcs
外形尺寸(长×宽×高)	Outline dimension(L×W×H)	700×1200×1500mm	950×1450×1600mm
机重	Weight	350kg	700kg

* 机器外观及技术参数若有变更，恕不另行通知。未得本公司书面特别许可，不得擅自翻印本资料。
Chengqi is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved product without prior notice.

Fittings
配件

Inline Gravure
Printing Machine
连线凹版印刷机组



LD-10T
Hydraulic Rocker Punching Machine
液压摇臂冲口机



BZD
Punching Machine
冲口机



Electrical Corona
Treater
电子式电晕处理机



Conveyor
输送台



Metric Weight
Control System
米克重



Metric Weight
Control System
米克重



Multi-components
gravimetric dosing
多组分矢量称重喂料装置



180
Automatic Film Extraction And Crushing Machine
薄膜自动引取粉碎机



Mixer
搅拌机



Mixer
立式搅拌机



Screw and Barrel
螺杆和料筒



High-Speed
Screen Changer
快速换网器



Hydraulic
Screen Changer
液压换网



Auto Loader
自动吸料机



Dryer
干燥机



Air Ring
风环



High Speed Airing
高速风环



Die Head
模头



PP Blown Film Machine
Water Jacket
PP吹膜机水套



Core&Cap
模芯模盖



Air Ring Chassis
风环底盘



High Strength Hard Toothed
Surface Reduction Gearbox
高强度硬齿面减速箱



Screw Air Compressor
螺杆式空压机



Air Blower
螺杆料筒冷却小风机370W



Air Blower
风机



Auto tension control
自动张力系统



Camera inspection
静止画面



Closed chamber Dr.blade
封闭式刮刀



Anilox Roller
网纹辊



Bag Making Machine
Control System
制袋机控制系统



EPC
纠偏



Servo Motor
伺服电机



Inverter
变频器



Air Compressor
空气压缩机



Water Chiller
冷水机



Punch
打孔机



D-Punch
手提打孔机



Air Shaft
气胀轴



Rubber Roller
胶辊



Printing Press Rollers
印刷机版辊

